CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

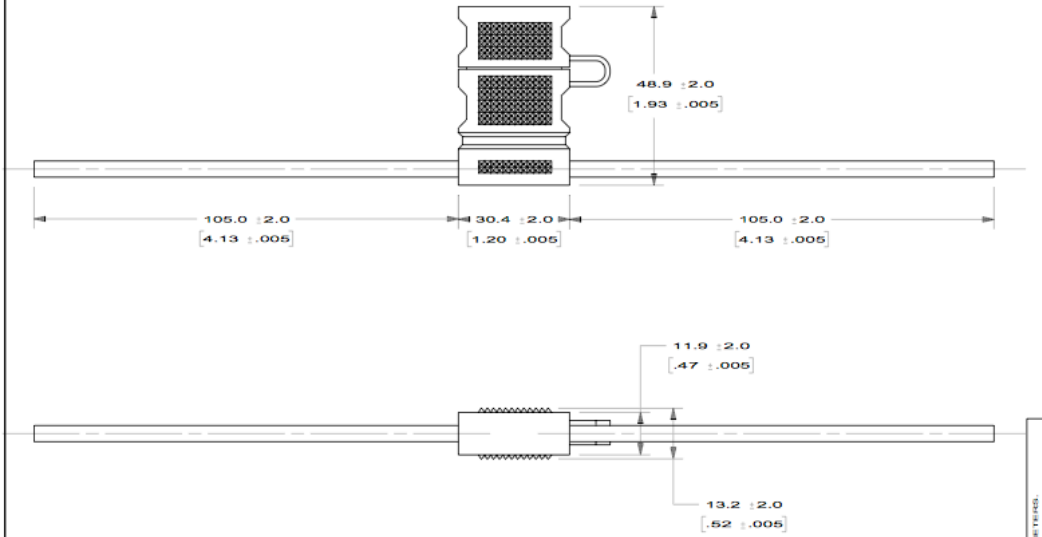

NOTES:
1. HOLDER MATERIAL : PVC NATURAL COLOR.
2. WIRE : 1015 12AWG RED.
3. RATING : MAX. 30A, 32VDC.
4. FUSEHOLDERS SHOULD NOT BE PLACED UNDER TENSION IN FINAL APPLICATION

METRIC
ASSEMBLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

◎ DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS STABILITY. PROCESSES FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS

CP DENOTES CP DIMENSIONS, MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
1				
1				
1				

BILL OF MATERIAL

COPIES TO	
1	9
2	10
3	12
4	13
5	14
6	15
7	16
8	17
18	
19	
20	
21	
23	
33	
43	
53	

MATL SPEC: SEE NOTES
FINISH: N/A
DRW: FYUE DATE: 05/02/12
CHK: DATE:
APD: DATE:
SCALE: 1:1
SUPER DR
FINSH GOOD WT
DRAWSPIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF: ISO 2768-1H)

DIMENSION	0.5 - 3	OVER 3 - 6	OVER 6 - 30	OVER 30 - 120	OVER 120 - 400
TOLERANCE	±0.05	±0.05	±0.1	±0.15	±0.2

3RD ANGLE PROJECTION

TITLE: ATO FUSE HOLDER (SMART GLOW)

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION: A
DRWG. NO. OL-0FHA0001HXGLO

LTR	DATE	REVISION	CHK	APD
A	05/10/12	504880ERA-RELEASED FYUE		